



**SCIENTIFIC
SALES, INC.**

"A Small, Minority & Woman-Owned Business"

visit us at www.scisale.com



Strategic Distributor
Industrial and Safety Solutions

3M™ Scotch-Weld™ Concrete Repair


5 minutes fast for safety and appearance

Cracks and spalls in concrete floors are an eyesore as well as a potential safety risk. Fixing them has meant either hiring and waiting for an outside contractor or doing it yourself with a repair method that takes the floor out of service for up to 24 hours. Now with 3M™ Concrete Repair, you save money and time.

- Self-leveling urethane flows smoothly into cleaned cracks and gaps and hardens in as little as 5 minutes. A fork lift can pass over a repair in as few as 15 minutes.
- Hardens to any depth without cracking or shrinking.
- Flexible urethane expands and contracts for durability that outlasts repairs made with concrete.
- Solvent-free
- Do it yourself with a common caulking gun and eliminate the cost and wait for an outside contractor.*

**Read product label instructions and precautions before applying.*

Easy to use—Just clean damaged area and fill. With every squeeze of the caulking gun trigger, cartridge nozzle meters and mixes precise proportions for optimum performance.

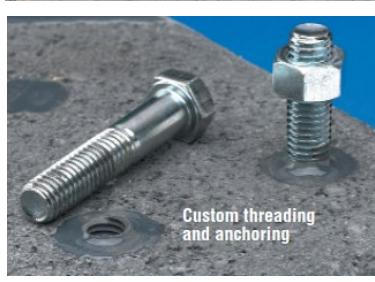

Quick and Easy Spall Repair

Clean

Remove all loose materials from area to be filled. Concrete should be dry and grease-free.

Fill

Dispense product into deepest part of repair area, slightly overfilling. Product self-levels and is tack-free in as little as one minute.

Finish

In as little as 15 minutes, product can be sanded to remove rough edges. It can be painted within one hour.



Applications

- Repairing cracks and spalls on concrete floors or horizontal surfaces
- Setting anchors in concrete floors or horizontal surfaces
- Light-duty custom threading and anchoring
- Use outdoors or in highly ventilated area

Approximate Coverage

Crack Width	Crack Depth	Linear Feet per 8.4 fl. oz.	Bead Size Dimension	Linear Feet per 8.4 fl. oz.
1/4"	1/4"	19.3	1/16"	815.0
1/2"	1/4"	9.9	1/8"	205.0
3/4"	1/4"	6.4	1/4"	51.9
1"	1/4"	4.9	3/8"	22.2
1/4"	1/2"	9.9	1/2"	12.4
1/2"	1/2"	4.9		
3/4"	1/2"	3.0		
1"	1/2"	2.0		

Contact your SSI Representative for all your 3M™ Concrete Needs!

865-483-9332 or 800-229-7252 | customerservice@scisale.com

